


THE Honey^M PLUS[†]

FRAMED 60-CELL MODULE

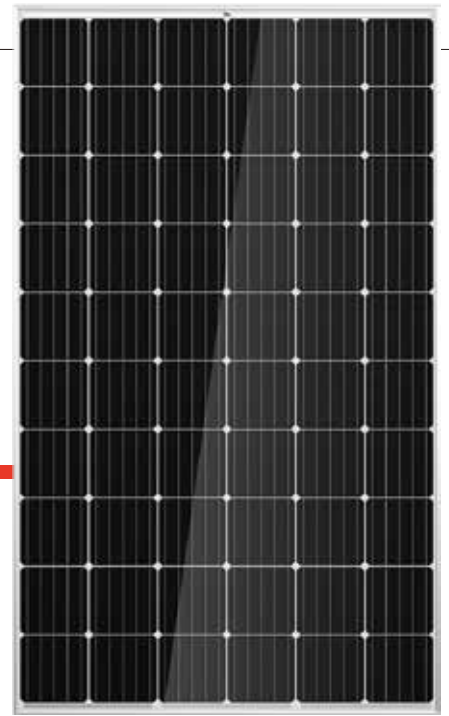

60 CELL
MONOCRYSTALLINE MODULE

275-315W
POWER OUTPUT RANGE


19.2%
MAXIMUM EFFICIENCY

0~+5W
POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

Comprehensive Products And System Certificates

IEC61215/IEC61730/UL1703/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse gases Emissions Verification
 OHSAS 18001: Occupation Health and Safety Management System

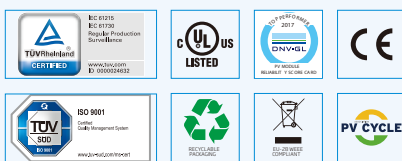

Excellent low light performance on cloudy days, mornings and evenings

- Advanced surface texturing
- Back surface field
- Selective emitter



Maximize limited space with top-end efficiency

- Up to 192W/m² power density
- Low thermal coefficients for greater energy production at high operating temperatures



Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant
- 100% EL double inspection




Certified to withstand the most challenging environmental conditions

- 2400 Pa wind load
- 5400 Pa snow load
- 35 mm hail stones at 97 km/h

LINEAR PERFORMANCE WARRANTY


10 Year Product Warranty · 25 Year Linear Power Warranty

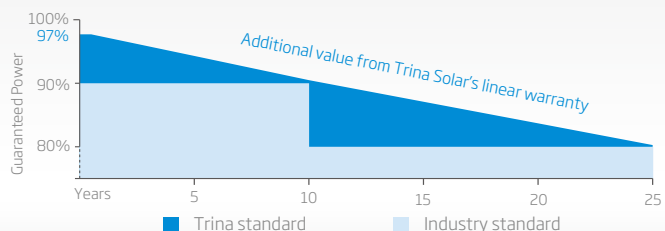


PRODUCTS POWER RANGE

| | |
|------------------|----------|
| TSM-DD05A(II) | 280-315W |
| TSM-DD05A.08(II) | 280-315W |
| TSM-DD05A.05(II) | 275-310W |

DIMENSIONS OF PV MODULE(mm)

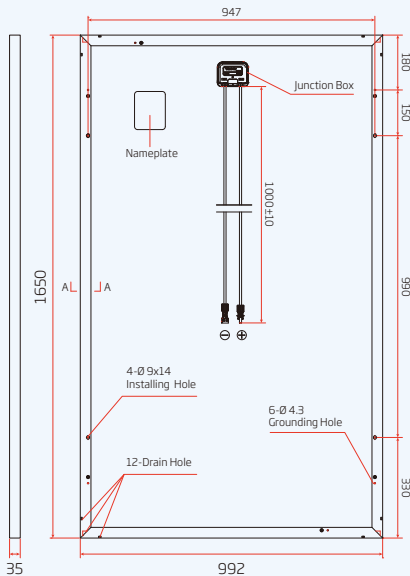


Back View




(A-A)

I-V CURVES OF PV MODULE(305W)

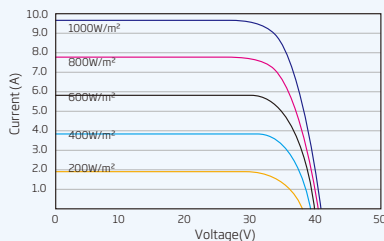

P-V CURVES OF PV MODULE(305W)

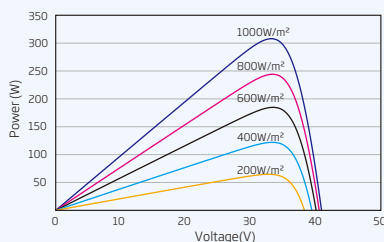

ELECTRICAL DATA (STC)

| | | | | | | | | | |
|---------------------------------------|--------|------|------|------|------|------|------|------|------|
| Peak Power Watts- P_{MAX} (Wp)* | 275 | 280 | 285 | 290 | 295 | 300 | 305 | 310 | 315 |
| Power Output Tolerance- P_{MAX} (W) | 0 ~ +5 | | | | | | | | |
| Maximum Power Voltage- V_{MPP} (V) | 31.4 | 31.7 | 31.8 | 32.2 | 32.5 | 32.6 | 32.9 | 33.1 | 33.3 |
| Maximum Power Current- I_{MPP} (A) | 8.76 | 8.84 | 8.97 | 9.01 | 9.08 | 9.19 | 9.28 | 9.37 | 9.46 |
| Open Circuit Voltage- V_{OC} (V) | 38.4 | 38.4 | 38.5 | 38.9 | 39.6 | 39.8 | 40.0 | 40.2 | 40.5 |
| Short Circuit Current- I_{SC} (A) | 9.24 | 9.42 | 9.51 | 9.66 | 9.68 | 9.77 | 9.85 | 9.94 | 10.0 |
| Module Efficiency η_m (%) | 16.8 | 17.1 | 17.4 | 17.7 | 18.0 | 18.3 | 18.6 | 18.9 | 19.2 |

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
*Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

| | | | | | | | | | |
|--------------------------------------|------|------|------|------|------|------|------|------|------|
| Maximum Power- P_{MAX} (Wp) | 205 | 209 | 212 | 216 | 220 | 223 | 227 | 231 | 235 |
| Maximum Power Voltage- V_{MPP} (V) | 29.1 | 29.4 | 29.5 | 29.9 | 30.1 | 30.2 | 30.5 | 30.7 | 30.9 |
| Maximum Power Current- I_{MPP} (A) | 7.04 | 7.10 | 7.21 | 7.24 | 7.30 | 7.38 | 7.46 | 7.53 | 7.60 |
| Open Circuit Voltage- V_{OC} (V) | 35.7 | 35.7 | 35.8 | 36.2 | 36.8 | 37.0 | 37.2 | 37.4 | 37.6 |
| Short Circuit Current- I_{SC} (A) | 7.46 | 7.61 | 7.68 | 7.80 | 7.82 | 7.89 | 7.95 | 8.03 | 8.10 |

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

| | |
|-------------------|---|
| Solar Cells | Monocrystalline 156.75 × 156.75 mm (6 inches) |
| Cell Orientation | 60 cells (6 × 10) |
| Module Dimensions | 1650 × 992 × 35 mm (65.0 × 39.1 × 1.38 inches) |
| Weight | 18.6 kg (41.0 lb) |
| Glass | 3.2 mm (0.13 inches), High Transmission, AR Coated Tempered Glass |
| Backsheet | White [DD05A(II), DD05A.08(II)]; Black [DD05A.05(II)] |
| Frame | Silver Anodized Aluminium Alloy [DD05A(II)]; Black Anodized Aluminium Alloy [DD05A.08(II), DD05A.05(II)] |
| J-Box | IP 67 or IP 68 rated |
| Cables | Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), 1000 mm (39.4 inches) |
| Connector | MC4/UTX/TS4/QC4* |

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

| | |
|---|-------------|
| NOCT (Nominal Operating Cell Temperature) | 44°C (±2°C) |
| Temperature Coefficient of P_{MAX} | -0.39%/°C |
| Temperature Coefficient of V_{OC} | -0.29%/°C |
| Temperature Coefficient of I_{SC} | 0.05%/°C |

MAXIMUM RATINGS

| | |
|-------------------------|--|
| Operational Temperature | -40~+85°C |
| Maximum System Voltage | 1000V DC (IEC) 1000V DC (UL) |
| Max Series Fuse Rating | 15A (Power ≤ 285W) 20A (Power ≥ 290W) |

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

WARRANTY

| |
|--------------------------------------|
| 10 year Product Workmanship Warranty |
| 25 year Linear Power Warranty |

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

| |
|---------------------------------------|
| Modules per box: 30 pieces |
| Modules per 40' container: 840 pieces |