



TSM-DE06H (II)



**120 HALF-CUT**  
MONOCRYSTALLINE MODULE

**315-335W**  
POWER OUTPUT RANGE

**19.7%**  
MAXIMUM EFFICIENCY

**0/+5W**  
POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina Solar is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina Solar as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

**Comprehensive Product And System Certificates**

IEC61215/IEC61730/UL1703  
IEC61701 Salt Mist Corrosion  
IEC62716 Ammonia Corrosion  
IEC60068 Blowing Sand  
ISO9001; ISO14001; OHSAS18001



**Higher power for large scale installations**

- High performance mono PERC cells
- Reduced BOS costs with higher power bins and 1,500V system voltage
- Consistently high bankability ratings by BNEF, banks and investors



**Half-cut cell design brings higher efficiency**

- Optimized power output under inter-row shading conditions
- Integrated LRF for increased performance
- Low thermal coefficients for higher energy yield at elevated operating temperatures
- Reduced interconnection losses



**Highly reliable due to stringent quality control**

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant
- 2x 100% inline EL inspection




**Certified to withstand challenging environmental conditions**


- Salt Mist Corrosion
- Ammonia Corrosion
- Blowing Sand

**LINEAR PERFORMANCE WARRANTY**


10 Year Product Warranty · 25 Year Linear Power Warranty

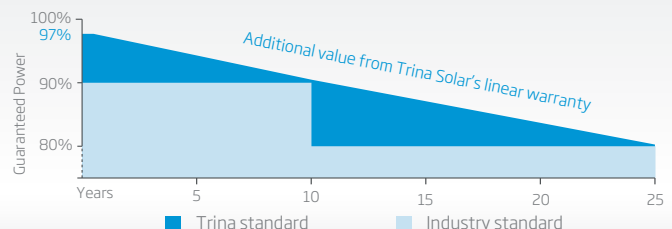


## DIMENSIONS OF PV MODULE TSM-DE06H(II) (unit: mm)

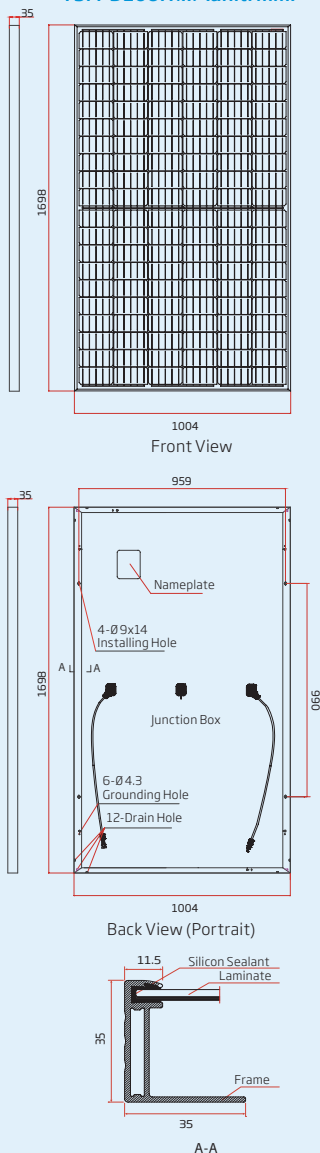

### I-V CURVES OF PV MODULE (325W)

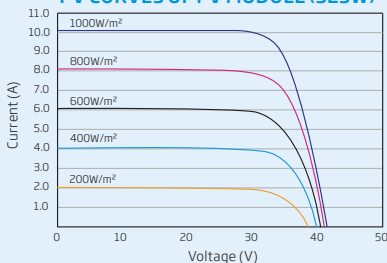

### P-V CURVES OF PV MODULE (325W)

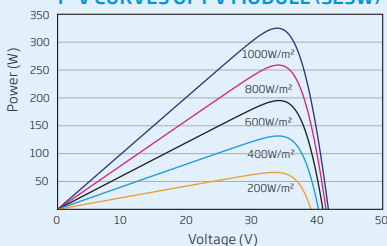

ELECTRICAL DATA @ STC	TSM-315 DE06H(II)	TSM-320 DE06H(II)	TSM-325 DE06H(II)	TSM-330 DE06H(II)	TSM-335 DE06H(II)
Peak Power Watts- $P_{MAX}$ (Wp)*	315	320	325	330	335
Power Output Tolerance- $P_{MAX}$ (W)	0/+5	0/+5	0/+5	0/+5	0/+5
Maximum Power Voltage- $U_{MPP}$ (V)	33.4	33.7	34.0	34.3	34.6
Maximum Power Current- $I_{MPP}$ (A)	9.44	9.50	9.56	9.63	9.69
Open Circuit Voltage- $U_{OC}$ (V)	41.1	41.5	41.9	42.2	42.6
Short Circuit Current- $I_{SC}$ (A)	9.96	10.01	10.06	10.14	10.20
Module Efficiency $\eta_m$ (%)	18.5	18.8	19.1	19.4	19.7

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5  
\* Measuring tolerance:  $\pm 3\%$

ELECTRICAL DATA @ NMOT	TSM-315 DE06H(II)	TSM-320 DE06H(II)	TSM-325 DE06H(II)	TSM-330 DE06H(II)	TSM-335 DE06H(II)
Maximum Power- $P_{MAX}$ (Wp)	238	242	245	249	253
Maximum Power Voltage- $U_{MPP}$ (V)	31.5	31.8	32.1	32.4	32.7
Maximum Power Current- $I_{MPP}$ (A)	7.55	7.59	7.63	7.69	7.74
Open Circuit Voltage- $U_{OC}$ (V)	38.8	39.1	39.4	39.7	40.1
Short Circuit Current- $I_{SC}$ (A)	8.03	8.07	8.11	8.18	8.22

NMOT: Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s.

## MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Orientation	120 cells (6 x 20)
Module Dimensions	1698 x 1004 x 35 mm
Weight	18.7 kg
Glass	3.2 mm, High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA
Backsheet	White
Frame	35 mm Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Cable 4.0mm <sup>2</sup> , Portrait: N 140mm/P 285mm, Landscape: N 1200 mm /P 1200 mm
Connector	TS4

## TEMPERATURE RATINGS

NMOT (Nominal Module Operating Temperature)	41°C ( $\pm 3K$ )
Temperature Coefficient of $P_{MAX}$	-0.37%/K
Temperature Coefficient of $U_{OC}$	-0.29%/K
Temperature Coefficient of $I_{SC}$	0.05%/K

## MAXIMUM RATINGS

Operational Temperature	-40 to +85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20 A
Snow Load	5400 Pa (3600 Pa*)
Wind Load	2400 Pa (1600 Pa*)

\*design load with safety factor 1.5  
(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)


## PACKAGING CONFIGURATION

Modules per box:	30 pieces
Modules per 40' container:	720 pieces

## WARRANTY

10 year Product Workmanship Warranty
25 year Linear Performance Warranty

(Please refer to product warranty for details)



TSM\_EN\_2019\_A