



# Trinatracker Smart Controller

# TCU

Track and Boost Your Energy



## SuperTrack™

Smart Tracking Algorithm & Smart Backtracking Algorithm  
Increase power generation by up to 3-8%



## Multi-function modes improve reliability

Strong wind protection mode  
Heavy rain cleaning mode  
Automatic snow removal mode



## Active closed-loop tracking control

32-bit high-performance MCU




## Stable wireless communication

LoRa/ZigBee-wireless communication technology



## Multiple power supply

String-powered (250-1500V DC)  
Self-powered (input < 55V)

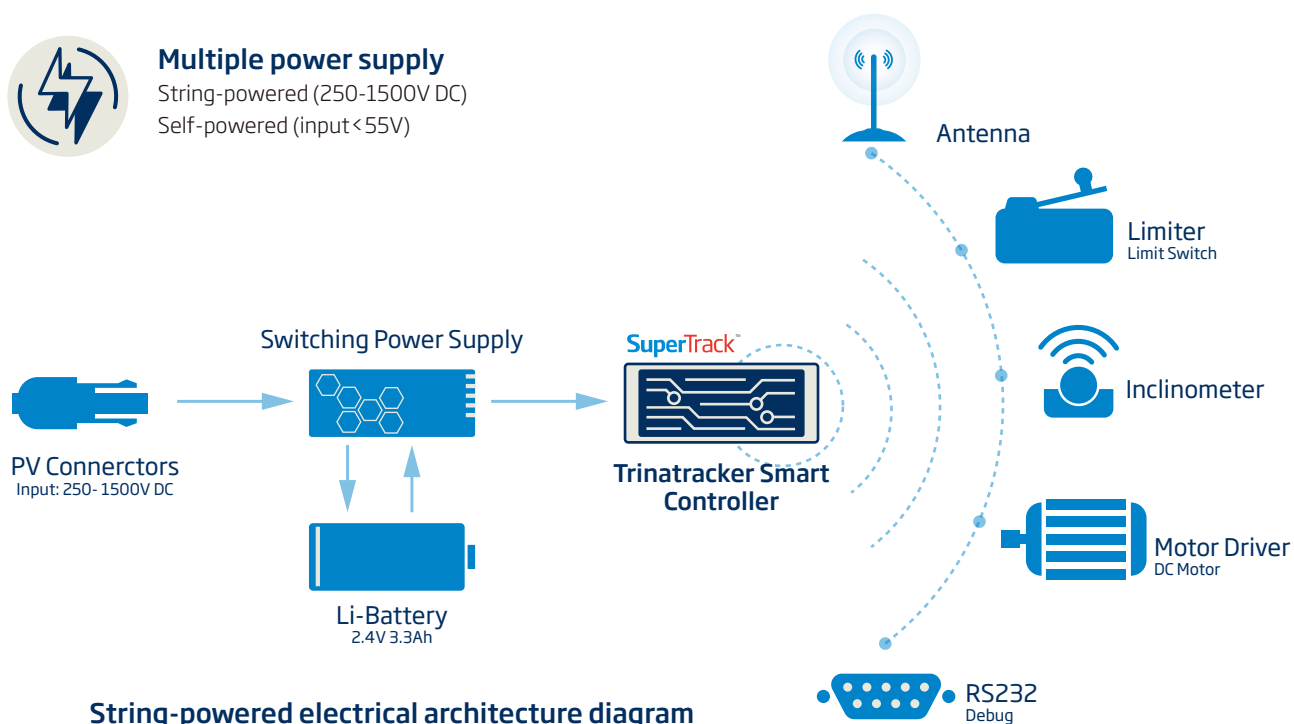

String-powered electrical architecture diagram

# Trina Tracker Control Unit

## Controller Electrical Specifications

# TCU

### Characteristic Parameters

#### Input

String-powered Supply	String-powered (250-1500V DC)
Self-powered Supply (Settable)	Self-powered (Input < 55V)

#### Output

Working Voltage	DC 24V
Rated Output Current	6A
Max. Output Current	10A

#### Battery

Battery Type	Lithium-ion Battery
Battery Capacity (String-powered supply)	3350mAh
Battery Capacity (Self-powered supply)	6700mAh

#### Power Consumption

Daily Energy Consumption	0.2 kWh/Day
--------------------------	-------------

### Smart Controlling

Tracking Algorithm	SuperTrack™
Rainy Cleaning Mode	Yes
Snow Mode	Yes
Hail Pattern	Yes (Settable)
Wind Protection	Multi-Level Wind Protection
Reset Protection at Night Parking	Yes
Rotation Limit Protection	Yes
Motor Overcurrent Protection	Yes
Manual/Automatic Tracking Mode	Yes
Emergency Button	Yes

### General Data

Certification	CE, IEC, TUV, SGS
Environment Temperature	-30°C ~ 60°C <sup>(1)</sup>
Tracking Angle	up to ±60°
Tracking Accuracy	< ±1°
Wireless Communication	LoRa/ZigBee
Wire communication	(Settable)
Protection Level	IP65
Weight	< 8kg
Dimensions	375*126*165mm (L*W*H)

<sup>(1)</sup> Standard configuration. Different conditions under request, please consult TrinaTracker