



**BACKSHEET MONOCRYSTALLINE MODULE**

PRODUCT: TSM-XXXDE20

POWER RANGE: 585-605W

**605W**

MAXIMUM POWER OUTPUT

**0~+5W**

POWER SELECTION

**21.4%**

MAXIMUM EFFICIENCY



**High customer value**

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



**High power Mono Perc up to 605W**

- Up to 21.4% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



**High reliability**


- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



**High energy yield**

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature

**Trina Solar's Backsheet Performance Warranty**



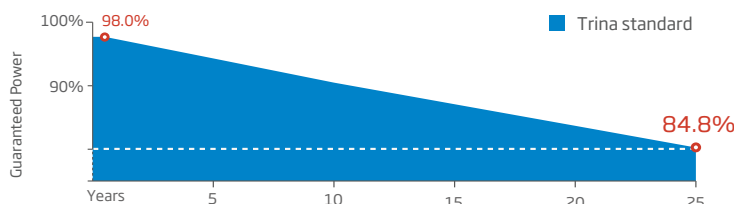


**Comprehensive Products and System Certificates**



IEC61215/IEC61730/IEC61701/IEC62716/UL61730  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System

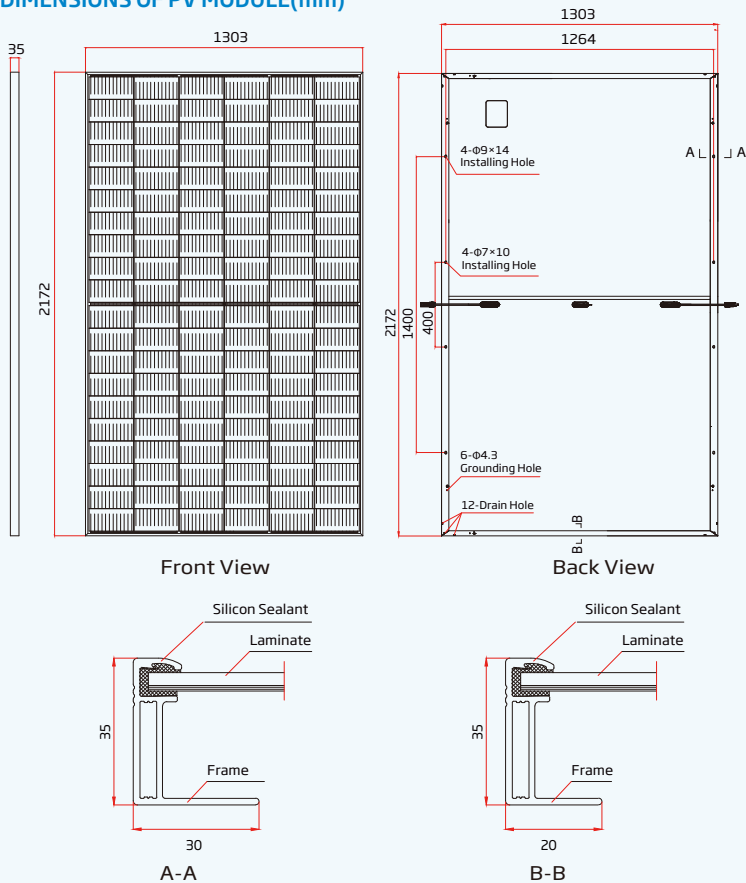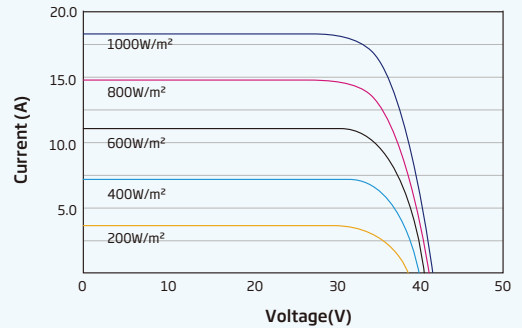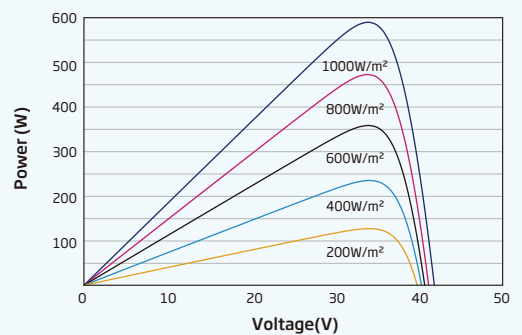

**DIMENSIONS OF PV MODULE(mm)**

**I-V CURVES OF PV MODULE(595 W)**

**P-V CURVES OF PV MODULE(595W)**

**ELECTRICAL DATA (STC) -TSM-XXXDE20(XXX=585-605)**

Peak Power Watts -P <sub>MAX</sub> (Wp)*	585	590	595	600	605
Power Selection-P <sub>MAX</sub> (W)			0 ~ +5		
Maximum Power Voltage -V <sub>MPP</sub> (V)	33.8	34.0	34.2	34.4	34.6
Maximum Power Current -I <sub>MPP</sub> (A)	17.31	17.35	17.40	17.44	17.49
Open Circuit Voltage -V <sub>OC</sub> (V)	40.9	41.1	41.3	41.5	41.7
Short Circuit Current -I <sub>SC</sub> (A)	18.37	18.42	18.47	18.52	18.57
Module Efficiency $\eta_m$ (%)	20.7	20.8	21.0	21.2	21.4

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

**ELECTRICAL DATA (NOCT)**

Maximum Power -P <sub>MAX</sub> (Wp)	443	447	451	454	458
Maximum Power Voltage -V <sub>MPP</sub> (V)	31.5	31.7	31.9	32.0	32.2
Maximum Power Current -I <sub>MPP</sub> (A)	14.05	14.09	14.13	14.18	14.22
Open Circuit Voltage -V <sub>OC</sub> (V)	38.5	38.7	38.9	39.1	39.3
Short Circuit Current -I <sub>SC</sub> (A)	14.81	14.85	14.88	14.92	14.96

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**MECHANICAL DATA**

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	2172×1303×35 mm (85.51×51.30×1.38 inches)
Weight	30.9 kg (68.1 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Backsheet	White
Frame	35mm(1.38 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Portrait: 280/280 mm(11.02/11.02 inches) Length can be customized
Connector	MC4 EVO2 / Trina Solar TS4

**TEMPERATURE RATINGS**

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	-0.34%/°C
Temperature Coefficient of V <sub>OC</sub>	-0.25%/°C
Temperature Coefficient of I <sub>SC</sub>	0.04%/°C

**MAXIMUM RATINGS**

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	30A

**WARRANTY**

12 year Product Workmanship Warranty  
25 year Power Warranty  
2% first year degradation  
0.55% Annual Power Attenuation

(Please refer to product warranty for details)

**PACKAGING CONFIGURATION**

Modules per box: 31 pieces  
Modules per 40' container: 558 pieces