




# N-type i-TOPCon

BACKSHEET MONOCRYSTALLINE MODULE

TSM-NE09RC.05 **400-430W**

**430<sub>W</sub>** / MAXIMUM POWER OUTPUT

**21.5%** / MAXIMUM EFFICIENCY

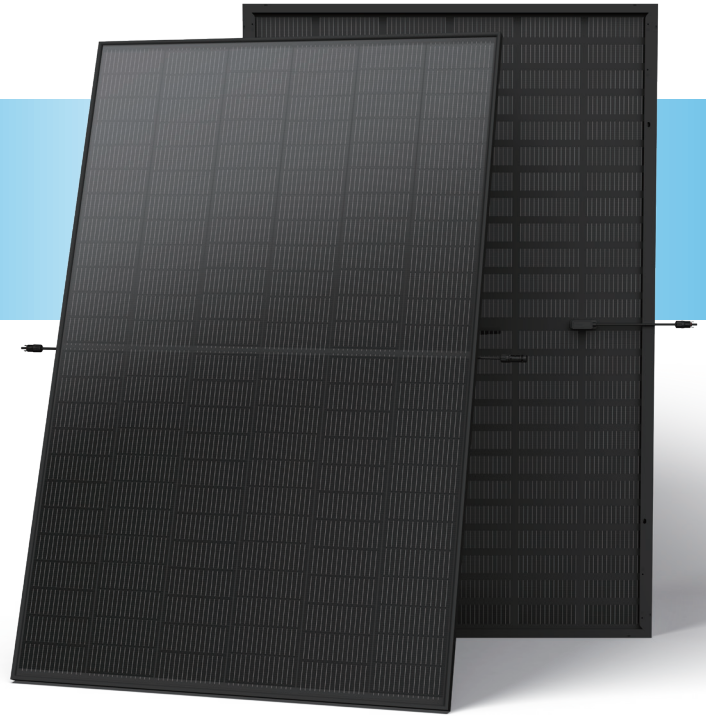

## High Customer Value

- Full black design, suitable for residential and C&I rooftop
- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Mechanical performance up to 6000 Pa positive load and 4000 Pa negative load



## High Performance

- Up to 21.5% module efficiency with high density interconnect technology
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



## High Reliability


- Innovative non-destructive cutting for improved mechanical resistance and strength
- Excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance which is fully applicable in coastal, high temperature, humidity area and harsh environment



## High energy yield

- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 25 years power warranty

## Performance Warranty

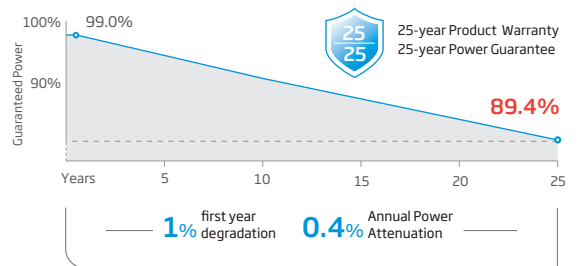

\* Please refer to product warranty for details

## Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716/UL61730

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System



**ELECTRICAL DATA** (STC & NOCT)

Testing Condition	STC		NOCT		STC		NOCT		STC		NOCT		STC		NOCT	
Peak Power Watts- $P_{MAX}(W_p)^*$	400	305	405	309	410	312	415	317	420	320	425	324	430	328		
Power Selection (W)**	0 ~ +5															
Maximum Power Voltage- $V_{MPP}(V)$	41.3	38.6	41.7	39.0	42.1	39.4	42.5	39.8	42.8	40.1	43.2	40.5	43.6	40.8		
Maximum Power Current- $I_{MPP}(A)$	9.68	7.88	9.71	7.91	9.73	7.93	9.77	7.96	9.80	7.98	9.84	8.01	9.87	8.04		
Open Circuit Voltage- $V_{oc}(V)$	49.2	46.7	49.6	47.1	50.1	47.6	50.5	47.9	50.9	48.3	51.4	48.8	51.8	49.1		
Short Circuit Current- $I_{sc}(A)$	10.30	8.30	10.33	8.32	10.37	8.36	10.40	8.38	10.43	8.41	10.47	8.44	10.50	8.46		
Module Efficiency $\eta_m(\%)$	20.0		20.3		20.5		20.8		21.0		21.3		21.5			

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s. \*Measuring tolerance: ±3%. \*\*Power selection up to: +3%.

**Electrical characteristics with different power bin** (reference to 5% & 10% backside power gain)

Backside Power Gain	5%		10%		5%		10%		5%		10%		5%		10%	
Peak Power Watts- $P_{MAX}(W_p)$	420	440	425	446	431	451	436	457	441	462	446	468	452	473		
Maximum Power Voltage- $V_{MPP}(V)$	41.3	41.3	41.7	41.7	42.1	42.1	42.5	42.5	42.8	42.8	43.2	43.2	43.6	43.6		
Maximum Power Current- $I_{MPP}(A)$	10.16	10.65	10.20	10.68	10.22	10.70	10.26	10.75	10.29	10.78	10.33	10.82	10.36	10.86		
Open Circuit Voltage- $V_{oc}(V)$	49.2	49.2	49.6	49.6	50.1	50.1	50.5	50.5	50.9	50.9	51.4	51.4	51.8	51.8		
Short Circuit Current- $I_{sc}(A)$	10.82	11.33	10.85	11.36	10.89	11.41	10.92	11.44	10.95	11.47	10.99	11.52	11.03	11.55		

Power Bifaciality: 65±10%.

**TEMPERATURE RATINGS**



NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of $P_{MAX}$	-0.29% /°C
Temperature Coefficient of $V_{oc}$	-0.24% /°C
Temperature Coefficient of $I_{sc}$	0.04% /°C

Due to different testing methods, the actual performances might differ from the declared specifications.

**MAXIMUM RATINGS**


Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	25A

**CURVES OF PV MODULE**

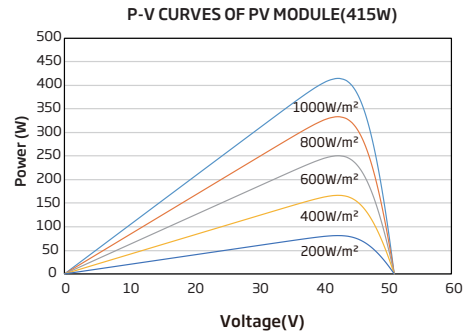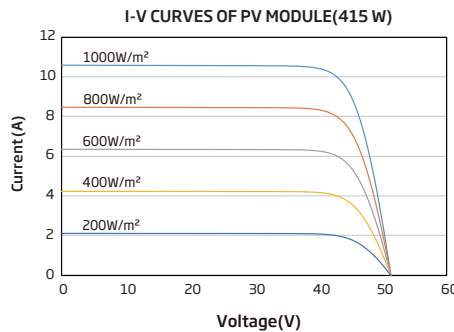

**MECHANICAL DATA**

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	144 cells
Module Dimensions	1762×1134×30 mm (69.37×44.65×1.18 inches)
Weight	21.3 kg (47.0 lb)
Front Glass	3.2mm (0.13inches), AR Coating Tempered Glass
Backsheet	Transparent Backsheet Black Grid
Frame	30mm (1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ) Landscape: 1100 mm/1100 mm (43.31/43.31 inches)
Connector	MC4 EVO2
Fire Type	Type 1 or Type 2
Packaging	Modules per box: 36 pieces Modules per 40' container: 792 pieces

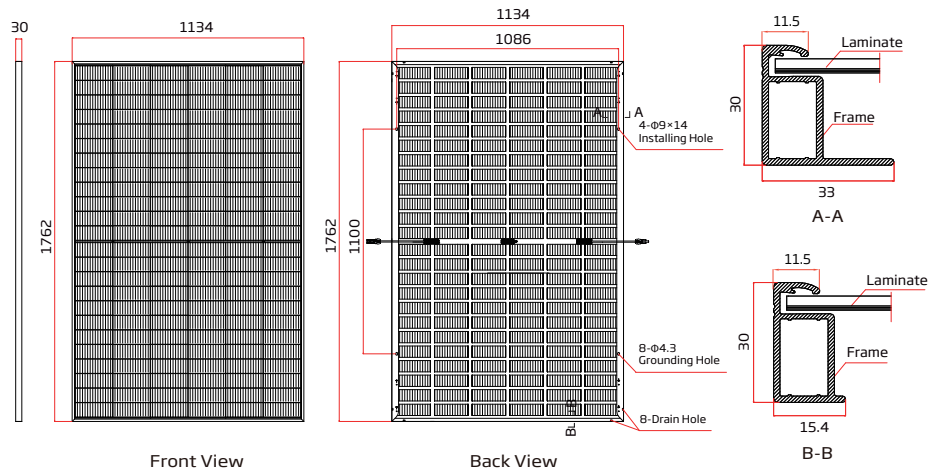

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.  
 © 2024 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.  
 The right of final interpretation belongs to Trina Solar Co., Ltd.  
 Version number: TSM\_NA\_EN\_2024\_B