



TSM-DE06M.08 (II)

120 HALF-CUT
MONOCRYSTALLINE CELLS

325-345W
POWER OUTPUT RANGE


20.5%
MAXIMUM EFFICIENCY

0/+5W
POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading total solution provider for solar energy. With local presence around the globe, Trina Solar is able to provide exceptional service to each customer in each market and deliver our innovative, reliable products with the backing of Trina as a strong, bankable brand. Trina Solar now distributes its PV products to over 100 countries all over the world. We are committed to building strategic, mutually beneficial collaborations with installers, developers, distributors and other partners in driving smart energy together.

Comprehensive Product And System Certificates

IEC61215/IEC61730/UL1703
IEC61701 Salt Mist Corrosion
IEC62716 Ammonia Corrosion
IEC60068 Blowing Sand
ISO9001; ISO14001; ISO45001

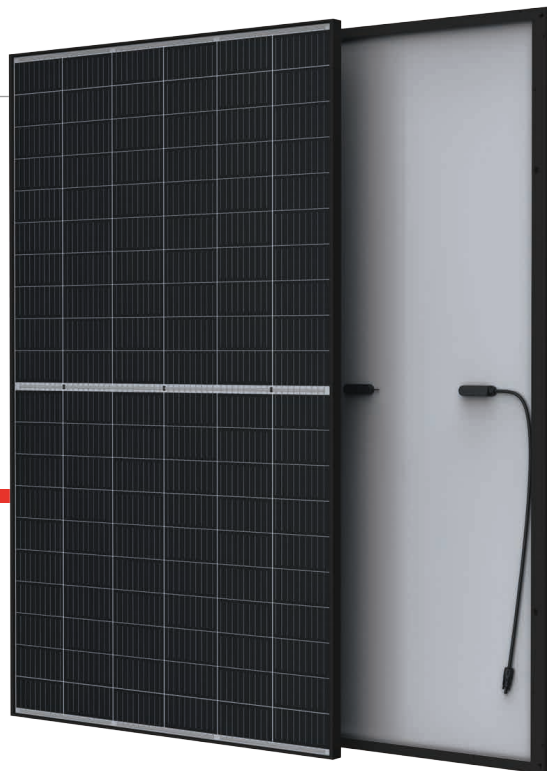

High power output

- Multi busbar technology combined with mono PERC cells
- Reduced BOS costs with higher power bins and 1,500V system voltage



Great for residential rooftop application

- Maximize limited space with up to 205 W/m² power density
- Ultra-thin, virtually invisible busbars



Half-cut cell design brings higher efficiency

- Low thermal coefficients for higher energy yield at elevated operating temperatures
- Reduced interconnection losses



Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant
- 2x 100% inline EL inspection




Certified to withstand challenging environmental conditions


- Salt Mist Corrosion
- Ammonia Corrosion
- Blowing Sand

PERFORMANCE WARRANTY


12 Year Product Warranty · 25 Year Power Warranty

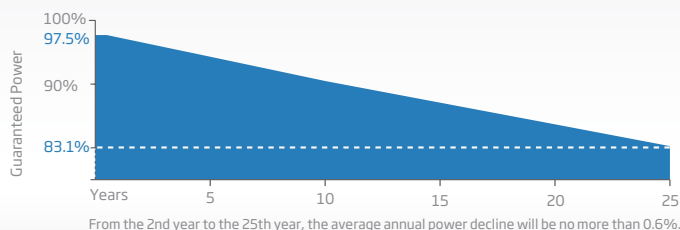


**DIMENSIONS OF PV MODULE
TSM-DE06M.08(II) (unit: mm)**

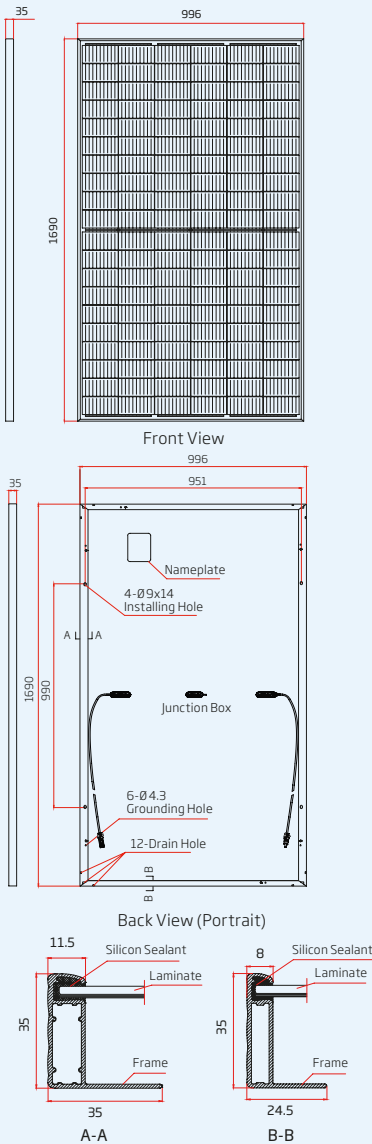

I-V CURVES OF PV MODULE (340 W)

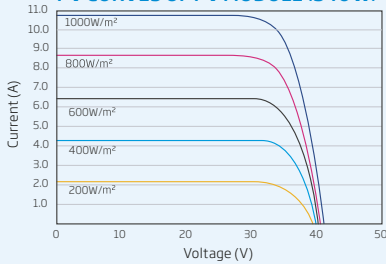

P-V CURVES OF PV MODULE (340 W)

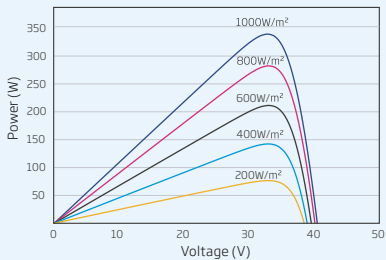

ELECTRICAL DATA @ STC	TSM-325 DE06M.08(II)	TSM-330 DE06M.08(II)	TSM-335 DE06M.08(II)	TSM-340 DE06M.08(II)	TSM-345 DE06M.08(II)
Peak Power Watts- P_{MAX} (W)*	325	330	335	340	345
Power Output Tolerance- P_{MAX} (W)	0/+5	0/+5	0/+5	0/+5	0/+5
Maximum Power Voltage- U_{MPP} (V)	33.6	33.8	34.0	34.2	34.5
Maximum Power Current- I_{MPP} (A)	9.67	9.76	9.85	9.94	10.00
Open Circuit Voltage- U_{OC} (V)	40.4	40.6	40.7	41.1	41.2
Short Circuit Current- I_{SC} (A)	10.30	10.39	10.48	10.55	10.56
Module Efficiency η_m (%)	19.3	19.6	19.9	20.2	20.5

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5
* Measuring tolerance: ±3%

ELECTRICAL DATA @ NMOT	TSM-325 DE06M.08(II)	TSM-330 DE06M.08(II)	TSM-335 DE06M.08(II)	TSM-340 DE06M.08(II)	TSM-345 DE06M.08(II)
Maximum Power- P_{MAX} (W)	246	250	254	257	261
Maximum Power Voltage- U_{MPP} (V)	31.4	31.6	31.7	32.0	32.3
Maximum Power Current- I_{MPP} (A)	7.83	7.91	7.99	8.04	8.07
Open Circuit Voltage- U_{OC} (V)	38.1	38.3	38.4	38.8	38.9
Short Circuit Current- I_{SC} (A)	8.29	8.36	8.44	8.49	8.50

NMOT: Irradiance 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Orientation	120 cells (6 x 20)
Module Dimensions	1690 x 996 x 35 mm
Weight	18.0 kg
Glass	3.2 mm, High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA
Backsheet	White
Frame	35mm Black Anodized Aluminum Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Cable 4.0mm ² , Portrait: N 280mm/P 280mm, Landscape: N 1200 mm /P 1200 mm
Connector	TS4

TEMPERATURE RATINGS

NMOT (Nominal Module Operating Temperature)	41°C (±3K)
Temperature Coefficient of P_{MAX}	-0.36%/K
Temperature Coefficient of U_{OC}	-0.26%/K
Temperature Coefficient of I_{SC}	0.04%/K

MAXIMUM RATINGS

Operational Temperature	-40 to +85°C
Maximum System Voltage	1500VDC (IEC) 1500VDC (UL)
Max Series Fuse Rating	20A
Snow Load	5400 Pa (3600 Pa*)
Wind Load	2400 Pa (1600 Pa*)

*design load with safety factor 1.5
(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

PACKAGING CONFIGURATION

Modules per box:	30 pieces
Modules per 40' container:	780 pieces

WARRANTY

12 year Product Workmanship Warranty
25 year Performance Warranty

(Please refer to product warranty for details)