




# N-type i-TOPCon

MONOFACIAL DUAL GLASS MODULE

TSM-XXXNEG18R.25 490-515W

**515<sub>W</sub>** / MAXIMUM  
POWER OUTPUT

**23.2%** / MAXIMUM  
EFFICIENCY

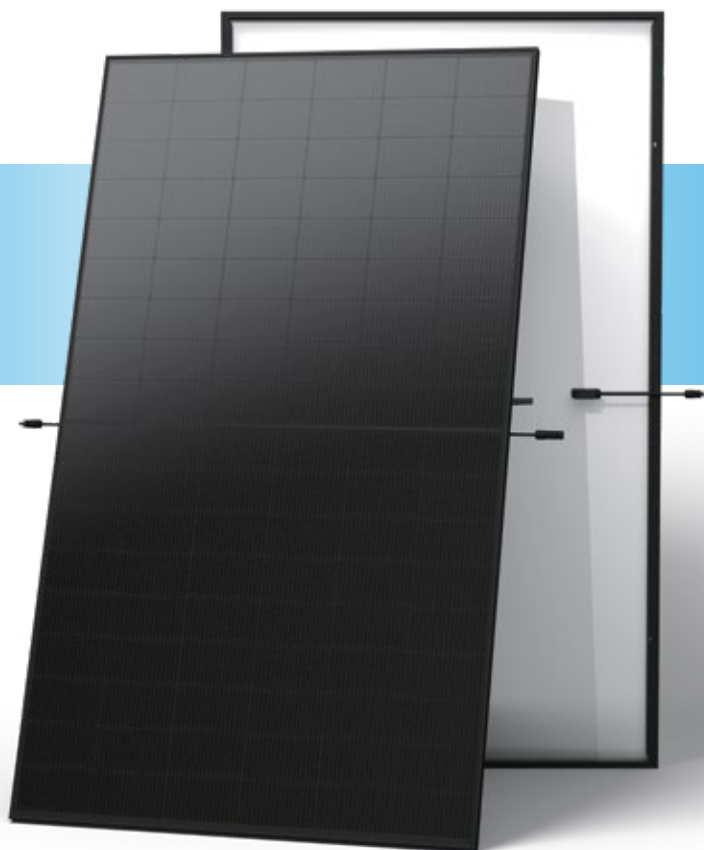

## High customer value

- Lower LCOE (levelized cost of energy), reduced BOS (balance of system) cost, shorter payback time
- Designed for compatibility with existing mainstream system components
- High module power, high string power and low voltage design
- Easy to handle and install on roofs with excellent size and light weight



## High power up to 515W

- Up to 23.2% module efficiency, on 210 innovation platform
- Patented i-TOPCon technology with continuous efficiency improvement, including contact resistance reduction, rear reflection enhancement and edge quality repairment



## Dual-glass design, high reliability


- Less prone to micro-cracks and scratches on the back during installation
- Fire class rating C, Safety Class II
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



## High energy yield

- Excellent low irradiation performance, validated by 3rd party
- Lower temperature coefficient (-0.29%/°C) and operating temperature

## Performance Warranty

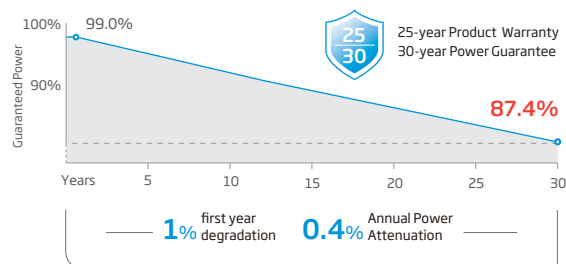

(\*Please refer to Limited Warranty Supplement that applies to the TSM-\*\*\*NEG18R.25. Products installed within Australia & New Zealand market.)

## Comprehensive Products and System Certificates

IEC61215/IEC61730

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification

ISO45001: Occupational Health and Safety Management System



## ELECTRICAL DATA (STC) TSM-XXXNEG18R.25 (XXX = 490-515)

Peak Power Watts- $P_{MAX}(W_p)^*$	490	495	500	505	510	515
Power Selection (W)	0 ~ +5					
Maximum Power Voltage- $V_{MPP}$ (V)	32.9	33.1	33.3	33.5	33.7	33.9
Maximum Power Current- $I_{MPP}$ (A)	14.91	14.97	15.03	15.09	15.14	15.20
Open Circuit Voltage- $V_{oc}$ (V)	39.6	39.8	40.1	40.3	40.6	40.9
Short Circuit Current- $I_{sc}$ (A)	15.80	15.83	15.86	15.89	15.93	15.96
Module Efficiency $\eta_m$ (%)	22.0	22.3	22.5	22.7	22.9	23.2

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance:  $P_{max} \pm 3\%$ ,  $V_{oc} \pm 3\%$  and  $I_{sc} \pm 4\%$

## ELECTRICAL DATA (NOCT)

Peak Power Watts- $P_{MAX}(W_p)$	375	378	382	386	390	394
Maximum Power Voltage- $V_{MPP}$ (V)	31.0	31.3	31.5	31.8	31.9	32.2
Maximum Power Current- $I_{MPP}$ (A)	12.06	12.08	12.11	12.15	12.21	12.23
Open Circuit Voltage- $V_{oc}$ (V)	37.6	37.7	38.0	38.3	38.5	38.8
Short Circuit Current- $I_{sc}$ (A)	12.74	12.76	12.78	12.81	12.84	12.86

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

## TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature) 43°C ( $\pm 2^\circ\text{C}$ )

Temperature Coefficient of  $P_{MAX}$  - 0.29% /°C

Temperature Coefficient of  $V_{oc}$  - 0.24% /°C

Temperature Coefficient of  $I_{sc}$  0.04% /°C

Due to different testing methods, the actual performances might differ from the declared specifications.

## MAXIMUM RATINGS


Operational Temperature -40~+70°C

Maximum System Voltage 1500V DC (IEC)


Max Series Fuse Rating 30A

## CURVES OF PV MODULE

I-V CURVES OF PV MODULE (505W)

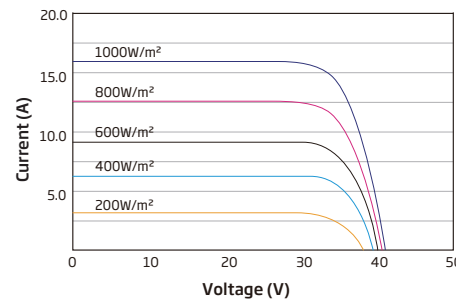


P-V CURVES OF PV MODULE (505W)

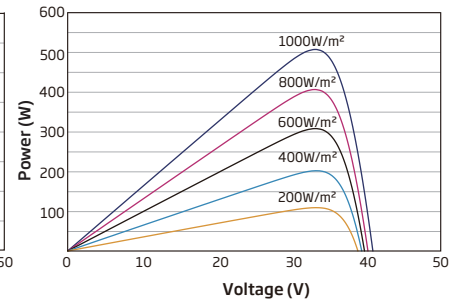

## MECHANICAL DATA

Solar Cells	N-type i-TOPCon Monocrystalline
No. of cells	108 cells
Module Dimensions	1961×1134×30 mm (77.20×44.65×1.18 inches)
Weight	23.5 kg (51.8 lb)
Front Glass	1.6mm (0.06inches), AR Coating Heat Strengthened Glass
Back Glass	1.6mm (0.06inches), Heat Strengthened Glass
Frame	30mm(1.18 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ) Portrait: 200/320 mm(7.87/12.60 inches) Length can be customized
Connector	Stäubli Electrical Connectors AG PV-KST4-EV02/xy_UR; PV-KBT4-EV02/xy_UR PV-KST4-EV02A/xy; PV-KBT4-EV02A/xy
Packaging	Modules per box: 36 pieces Modules per 40' container: 864 pieces

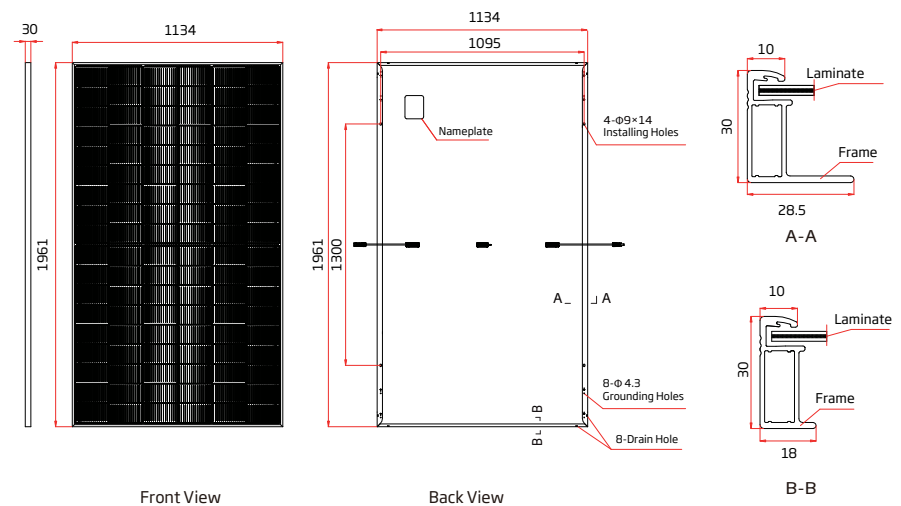

www.trinasolar.com

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.  
© 2025 Trina Solar Co., Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.  
The right of final interpretation belongs to Trina Solar Co., Ltd.  
Version number: TSM\_AUS\_EN\_2025\_C  
Country of Origin: China