



**BACKSHEET MONOCRYSTALLINE MODULE**

PRODUCT: TSM-DE19

PRODUCT RANGE: 530-555W

**555W+**

MAXIMUM POWER OUTPUT

**0~+5W**

POSITIVE POWER TOLERANCE

**21.2%**

MAXIMUM EFFICIENCY



**High customer value**

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components
- Higher return on Investment



**High power Mono Perc up to 555W**

- Up to 21.2% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



**High reliability**

- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load




**High energy yield**

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature



**Trina Solar's Backsheet Performance Warranty**



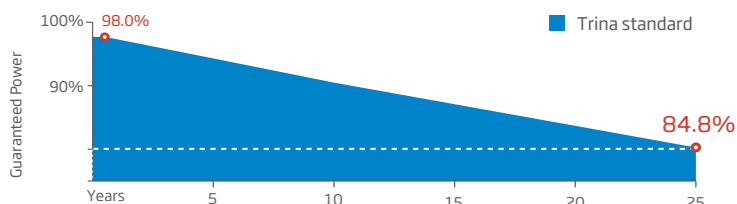


**Comprehensive Products and System Certificates**



IEC61215/IEC61730/IEC61701/IEC62716/UL61730  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System

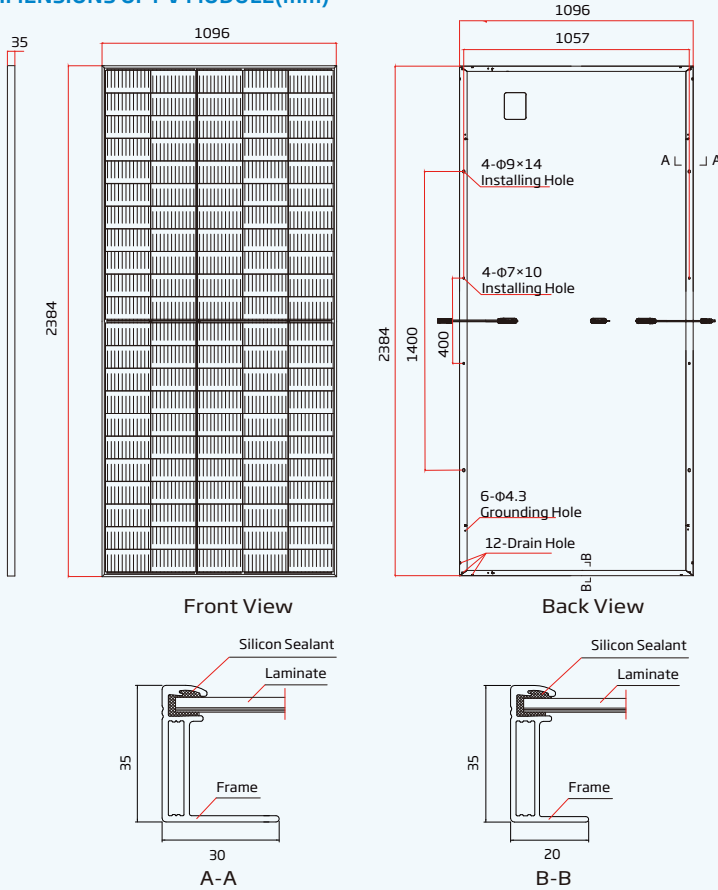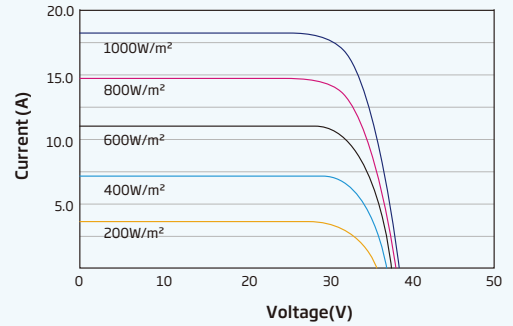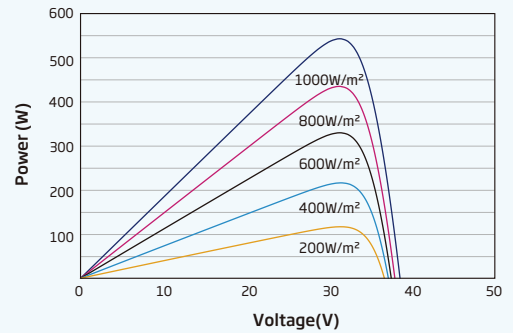

**DIMENSIONS OF PV MODULE(mm)**

**I-V CURVES OF PV MODULE(545 W)**

**P-V CURVES OF PV MODULE(545W)**

**ELECTRICAL DATA (STC)**

Peak Power Watts - P <sub>MAX</sub> (Wp)*	530	535	540	545	550	555
Power Tolerance - P <sub>MAX</sub> (W)	0 ~ +5					
Maximum Power Voltage - V <sub>MPP</sub> (V)	30.8	31.0	31.2	31.4	31.6	31.8
Maximum Power Current - I <sub>MPP</sub> (A)	17.21	17.28	17.33	17.37	17.40	17.45
Open Circuit Voltage - V <sub>OC</sub> (V)	37.1	37.3	37.5	37.7	37.9	38.1
Short Circuit Current - I <sub>SC</sub> (A)	18.31	18.36	18.41	18.47	18.52	18.56
Module Efficiency η <sub>m</sub> (%)	20.3	20.5	20.7	20.9	21.0	21.2

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

**ELECTRICAL DATA (NOCT)**

Maximum Power - P <sub>MAX</sub> (Wp)	401	405	409	413	417	420
Maximum Power Voltage - V <sub>MPP</sub> (V)	28.6	28.8	29.0	29.2	29.3	29.5
Maximum Power Current - I <sub>MPP</sub> (A)	14.01	14.06	14.10	14.15	14.19	14.23
Open Circuit Voltage - V <sub>OC</sub> (V)	35.0	35.1	35.3	35.5	35.7	35.9
Short Circuit Current - I <sub>SC</sub> (A)	14.76	14.80	14.84	14.88	14.92	14.96

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**MECHANICAL DATA**

Solar Cells	Monocrystalline
No. of cells	110 cells
Module Dimensions	2384×1096×35 mm (93.86×43.15×1.38 inches)
Weight	28.6 kg (63.1 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Backsheet	White
Frame	35mm(1.38 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Portrait: 280/280 mm(11.02/11.02 inches) Landscape: 1400/1400 mm(55.12/55.12 inches)
Connector	TS4

**TEMPERATURE RATINGS**

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	-0.34%/°C
Temperature Coefficient of V <sub>OC</sub>	-0.25%/°C
Temperature Coefficient of I <sub>SC</sub>	0.04%/°C

**MAXIMUM RATINGS**

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	30A

**WARRANTY**

12 year Product Workmanship Warranty  
25 year Power Warranty  
2% first year degradation  
0.55% Annual Power Attenuation

(Please refer to product warranty for details)

**PACKAGING CONFIGURATION**

Modules per box: 31 pieces  
Modules per 40' container: 620 pieces